


L88P 88 Plus/ L88P-A 88 Plus

JBL

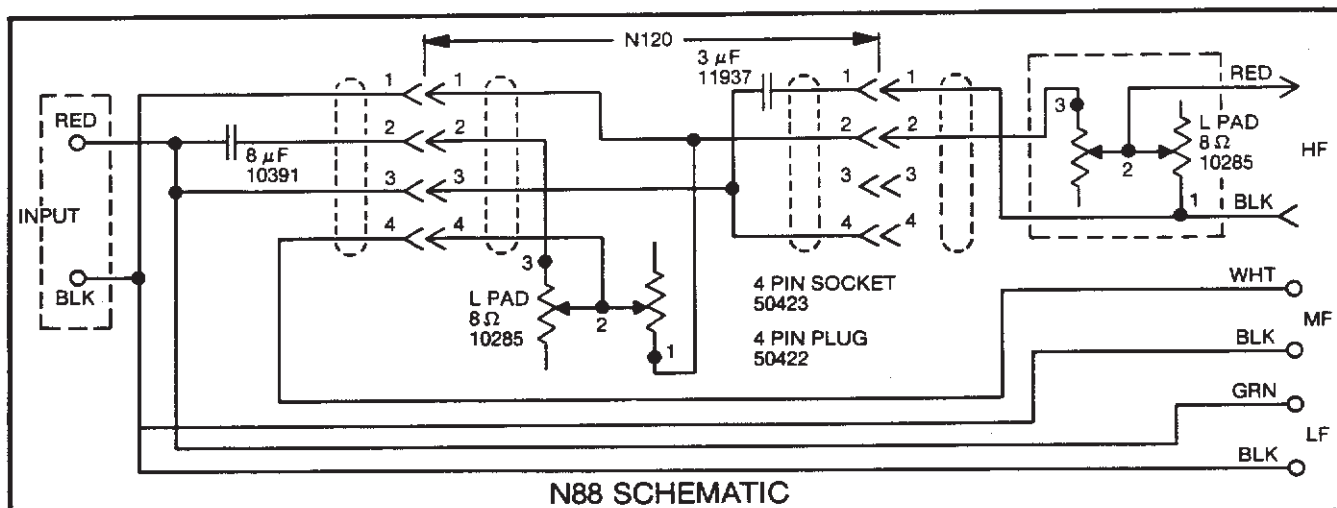

SYSTEM COMPONENTS:

LOW FREQUENCY DRIVER: 123A-1
 Cone Kit: C8R2212
 Nom. Impedance: 8 Ohm
 Dynamic Test Input V: 6
 Sweep Frequency Hz: 20-1200
 D.C. Resistance Ohms: 4.5 minimum
 5.5 maximum
 Gap Gauge: .044"
 Notes: Aquaplas
 If Not Serviceable, 2213H
 Replace With: (Reverse Polarity)
 Visual Change: Yes
 Baffle Modification: No
 Exact Acoustic Replacement: No.
 Slightly Different. Replace both units
 in a stereo pair.
 Additional Parts Currently Available*:
 Dome: 31385
 Trim Gasket: 32756

MID RANGE DRIVER: LE5-2
 (Included in M12 Expander Kit)
 Cone Kit: C8RLE52
 Nom. Impedance: 8 Ohm
 Dynamic Test Input V: 4
 Sweep Frequency Hz: 75-3000
 D.C. Resistance Ohms: 5.5 minimum
 6.5 maximum
 Gap Gauge: .040"
 Notes: Dome Inverted
 If Not Serviceable,
 Replace With: LE5-10
 Visual Change: Yes
 Baffle Modification: No
 Exact Acoustic Replacement: No.
 Slightly Different. Replace both units
 in a stereo pair.
 Additional Parts Currently Available*:
 Dome: 54721
 Trim Gasket: 29931

HIGH FREQUENCY DRIVER: LE25
 Diaphragm Kit: D8RLE25
 Nom. Impedance: 8 Ohm
 Dynamic Test Input V: 3
 Sweep Frequency Hz: 500-1200
 D.C. Resistance Ohms: 3.7 minimum
 4.2 maximum
 .029"
 Gap Gauge:
 Notes:
 If Not Serviceable,
 Replace With: 035TiA
 Visual Change: Yes
 Baffle Modification: Yes
 Exact Acoustic Replacement: No.
 Slightly Different. Replace both units
 in a stereo pair.
 Additional Parts Currently Available*:
 Trim Ring: 50402
 Mounting Gasket: 50949-01
 Dome: 21606

SYSTEM SPECIFICATIONS:

Nominal Impedance: 8 Ohm
 Power Capacity: 35 Watts Continuous
 Program (50 Watts Continuous Program w/M12)
 Crossover Frequencies: 2000 Hz
 (1500 and 6000 Hz w/M12)
 Sensitivity: 76dB (1 Watt @ 15 Feet)
 Enclosure Dim: 14-1/4" x 23-1/2" x 11-3/4" D
 36cm x 60cm x 30cm
 Shipping Weight:
 Additional Parts Currently Available*:
 Grill: G88-Cloth
 Binding Posts: Red: 10243
 Black: 10244

SYSTEM NOTES:

Optional M12 Expander Kit was available which included LE5-2 Midrange and N120 Crossover Module. Kit is no longer available.

*Other parts may also be available. Check with JBL for details.