


L200/L200A Studio Master

JBL

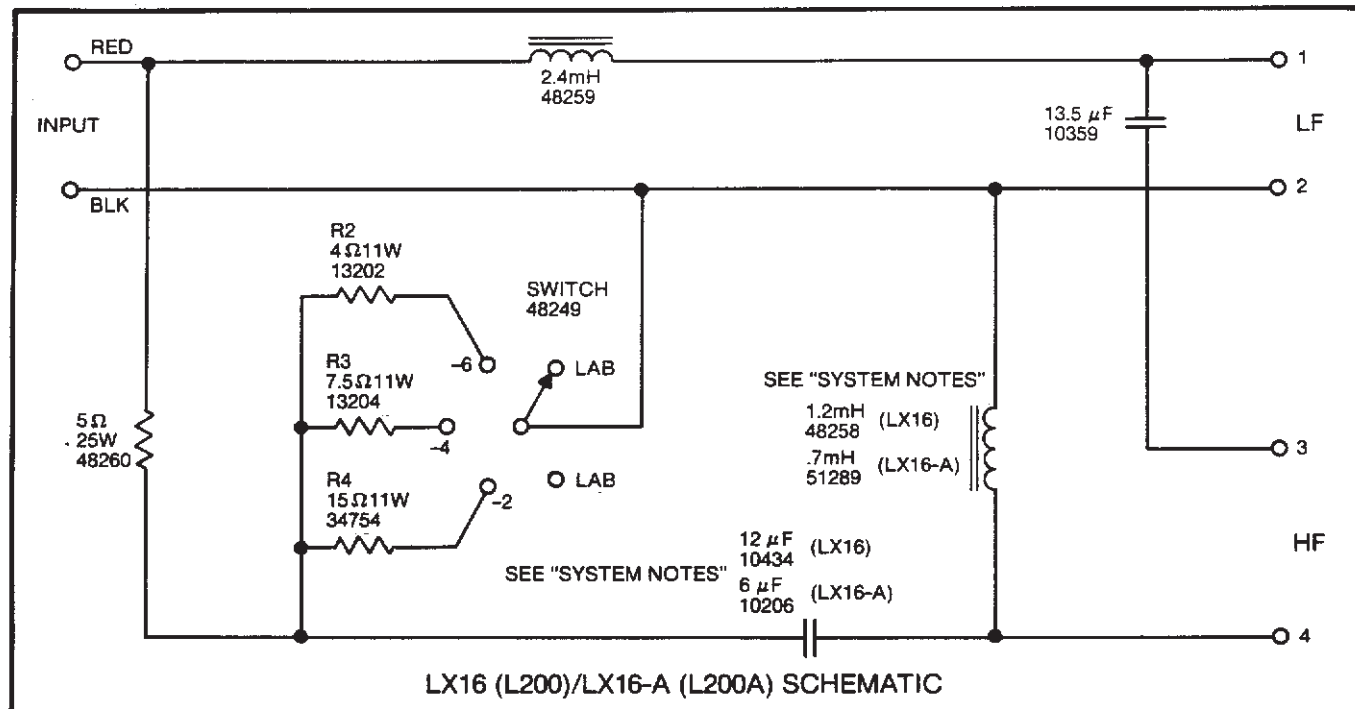

SYSTEM COMPONENTS:

LOW FREQUENCY DRIVER:

Cone Kit:	LE15B
Nom. Impedance:	C8RLE15B
Dynamic Test Input V:	8 Ohm
Sweep Frequency Hz:	8
D.C. Resistance Ohms:	20-1200
Gap Gauge:	3.1 min/3.9 max
Notes:	.057"

If Not Serviceable, Replace With:	2234H
Visual Change:	Yes
Baffle Modification:	No
Exact Acoustic Replacement:	No. Use as last resort.
Replace both units in a stereo pair.	

Additional Parts Currently Available*:

Dome:	21514
Mounting Gasket:	34499
Trim Gasket:	21058

HIGH FREQUENCY DRIVER:

Diaphragm Kit:	LE85
Nom. Impedance:	D16R2421
Dynamic Test Input V:	16 Ohm
Sweep Frequency Hz:	3.5
D.C. Resistance Ohms:	550-1200
	5.9 min/7.0 max

HIGH FREQUENCY DRIVER (Cont'd)

Gap Gauge:	.031"
Notes:	
If Not Serviceable, Replace With:	2425J
Visual Change:	Yes
Baffle Modification:	No
Exact Acoustic Replacement:	No. Slightly different.
Replace both units in a stereo pair.	
Additional Parts Currently Available*:	
Horn:	H91 (Lens L91 No Longer Available.)

SYSTEM SPECIFICATIONS:

Nom. Impedance:	8 Ohm
Power Capacity:	100 Watts Continuous Program
Crossover Frequency:	1200 Hz
Sensitivity:	80dB (1 Watt @ 15 Feet)
Enclosure Dim:	32-3/4" x 23-7/8" x 21-1/4" D 83cm x 61cm x 54cm
Shipping Weight:	125 lbs. - 57 kg.
Additional Parts Currently Available*:	
Grill:	G200-Cloth

SYSTEM NOTES:

It is suggested that the LX16 crossover be converted to LX16-A configuration to provide additional high frequency driver protection when used in the L200 System.

*Other parts may also be available. Check with JBL for details.