


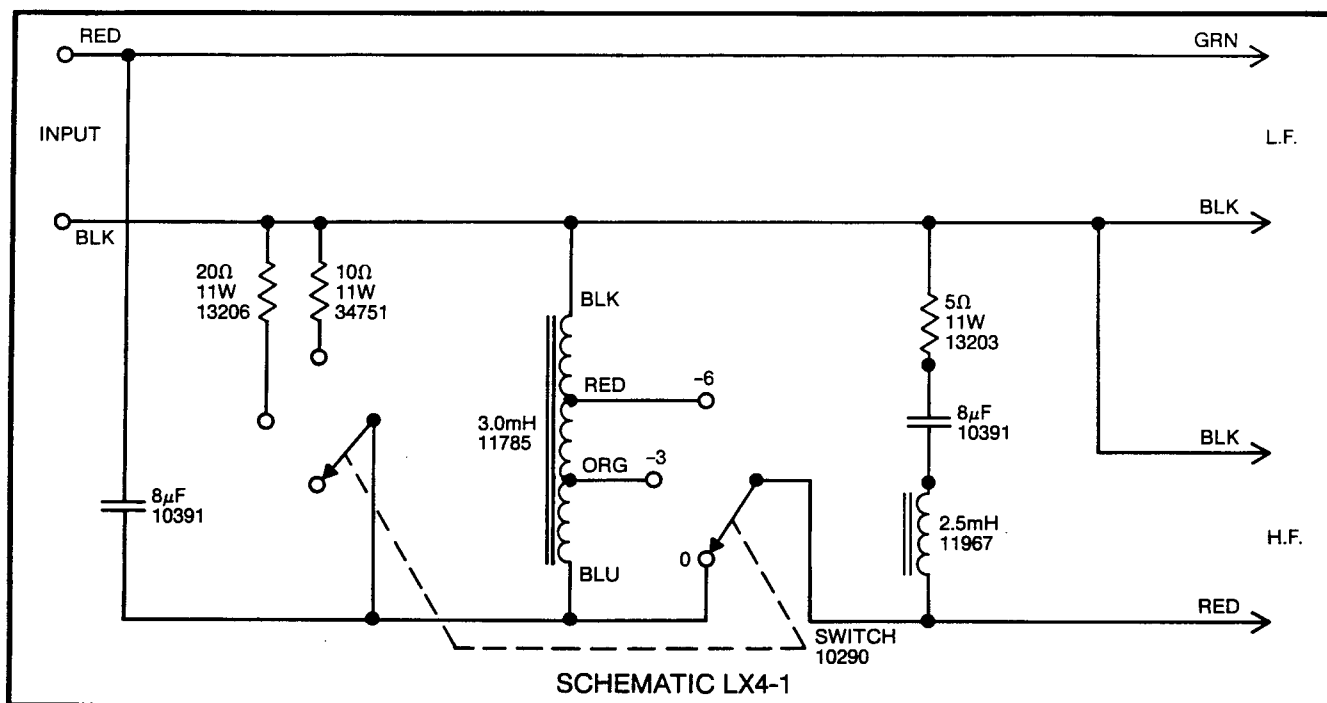

SYSTEM COMPONENTS:

LOW FREQUENCY DRIVER:

LE14A	
Cone Kit:	C8RLE14A
Nom. Impedance:	8 Ohm
Dynamic Test Input V:	8
Sweep Frequency Hz:	30-1200
D.C. Resistance Ohms:	5.9 min/7.1 max
Gap Gauge:	.057"
Notes:	Aquaplas on front and back of cone

If Not Serviceable, Replace With: LE14H-1

Visual Change:	Yes
Baffle Modification:	No
Exact Acoustic Replacement:	No. Slightly Different.
Replace both units in a stereo pair.	

Additional Parts Currently Available*:

Dome:	50201
Mounting Gasket:	20253
Trim Gasket:	21811

HIGH FREQUENCY DRIVER:

LE20-1	
Diaphragm Kit:	D8RLE20

HIGH FREQUENCY DRIVER (Cont'd)

Nom. Impedance:	8 Ohm
Dynamic Test Input V:	6
Sweep Frequency Hz:	1000-6000
D.C. Resistance Ohms:	3.7 min/4.2 max
Gap Gauge:	.029"
Notes:	Test With Network

If Not Serviceable, Replace With: 035TiA

Visual Change:	Yes
Baffle Modification:	No
Exact Acoustic Replacement:	No. Use as last resort. Replace both units in a stereo pair.

Additional Parts Currently Available*:

Trim Ring:	21600
------------	-------

SYSTEM SPECIFICATIONS:

Nom. Impedance:	8 ohm
Power Capacity:	35 Watts Continuous Program
Crossover Frequency:	2000 Hz
Sensitivity:	80dB (1 Watt @ 15 Feet)
Enclosure Dim:	14" x 24" x 12" D 36cm x 60cm x 30cm
Shipping Weight:	51 lbs. - 23 kg.
Additional Parts Currently Available*:	
Binding Posts:	Red: 10243 Black: 10244

*Other parts may also be available. Check with JBL for details.