


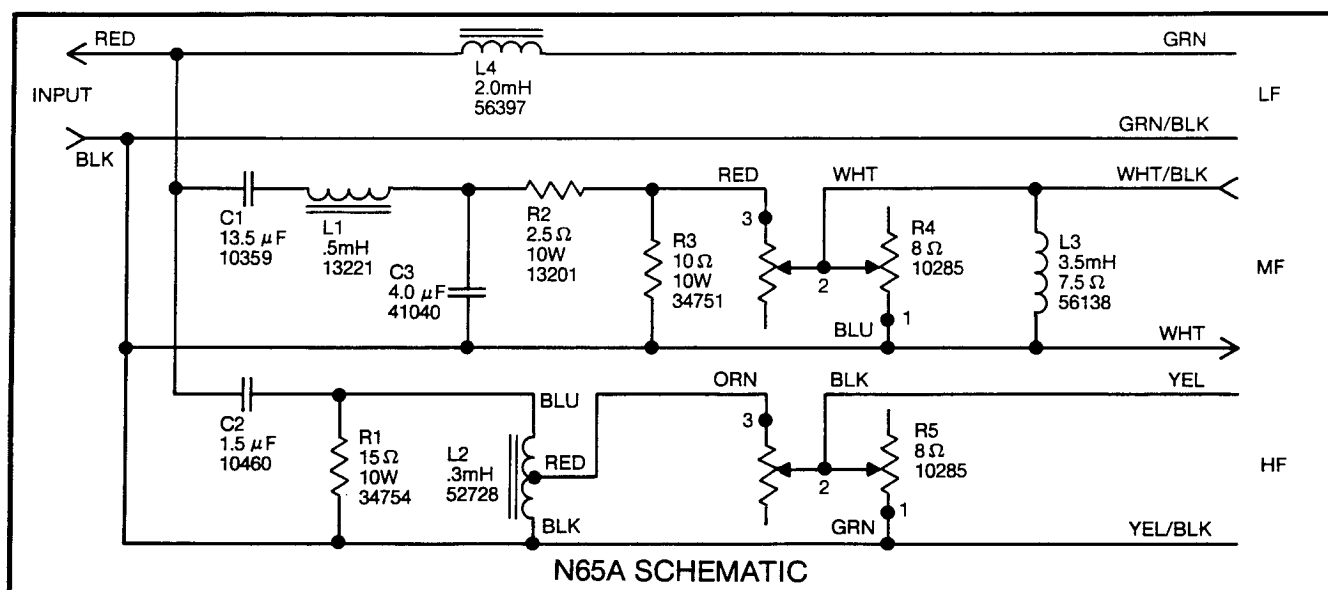

## SYSTEM COMPONENTS:

### LOW FREQUENCY DRIVER:

122A  
Cone Kit: C8R129H  
Nom. Impedance: 8 Ohm  
Dynamic Test Input V: 6  
Sweep Frequency Hz: 20-1200  
D.C. Resistance Ohms: 4.5 minimum  
5.5 maximum

Gap Gauge: .053"

Notes: Mass Ring.  
Cone kit may have aqua plas on cone instead of mass ring.

If Not Serviceable,

Replace With: 128H-1

Visual Change: Yes

Baffle Modification: No

Exact Acoustic Replacement: No.

Use as last resort. Replace both units in a stereo pair.

Additional Parts Currently Available\*:

Dome: 31385

Mounting Gasket: 20253

Trim Gasket: 52806

### MID RANGE DRIVER:

LE5-5  
Cone Kit: C8RLE59  
Nom. Impedance: 8 Ohm  
Dynamic Test Input V: 4  
Sweep Frequency Hz: 75-3000  
D.C. Resistance Ohms: 5.6 minimum  
6.6 maximum

Gap Gauge: .040"

Notes:

If Not Serviceable,

Replace With: LE5-11

Visual Change: Yes

Baffle Modification: No

### MID RANGE DRIVER (Cont'd)

Exact Acoustic Replacement: No.

Slightly different. Replace both units in a stereo pair.

Additional Parts Currently Available\*:

Dome: Was 54721 (Paper); Now 51868 (Alum.)

Trim Gasket: 29931

### HIGH FREQUENCY DRIVER:

077  
Diaphragm Kit: D16R2405

Nom. Impedance: 16 Ohm

Dynamic Test Input V: 7

Sweep Frequency Hz: 1000-3000

D.C. Resistance Ohms: 5.7 minimum

6.7 maximum

Gap Gauge: .025"

Notes:

Do not crease diaphragm.

If Not Serviceable,

Replace With: 2405H

Visual Change: Yes

Baffle Modification: No

Exact Acoustic Replacement: Yes

Additional Parts Currently Available\*:

Mounting Gasket: 51795

## SYSTEM SPECIFICATIONS:

Nominal Impedance: 8 Ohm

Max. Recommended

Amp Power: 200 Watts

Crossover Frequencies: 1000 Hz, 6500 Hz

Sensitivity: 89dB (1 Watt @ 1 Meter)

Enclosure Dim: 24-1/2" x 17-1/2" x 13-1/8" D

622mm x 445mm x 333mm

Shipping Weight: 67 lbs. - 30 kg.

Additional Parts Currently Available\*:

Binding Posts: Red: 56131

Black: 56130

\*Other parts may also be available. Check with JBL for details.