


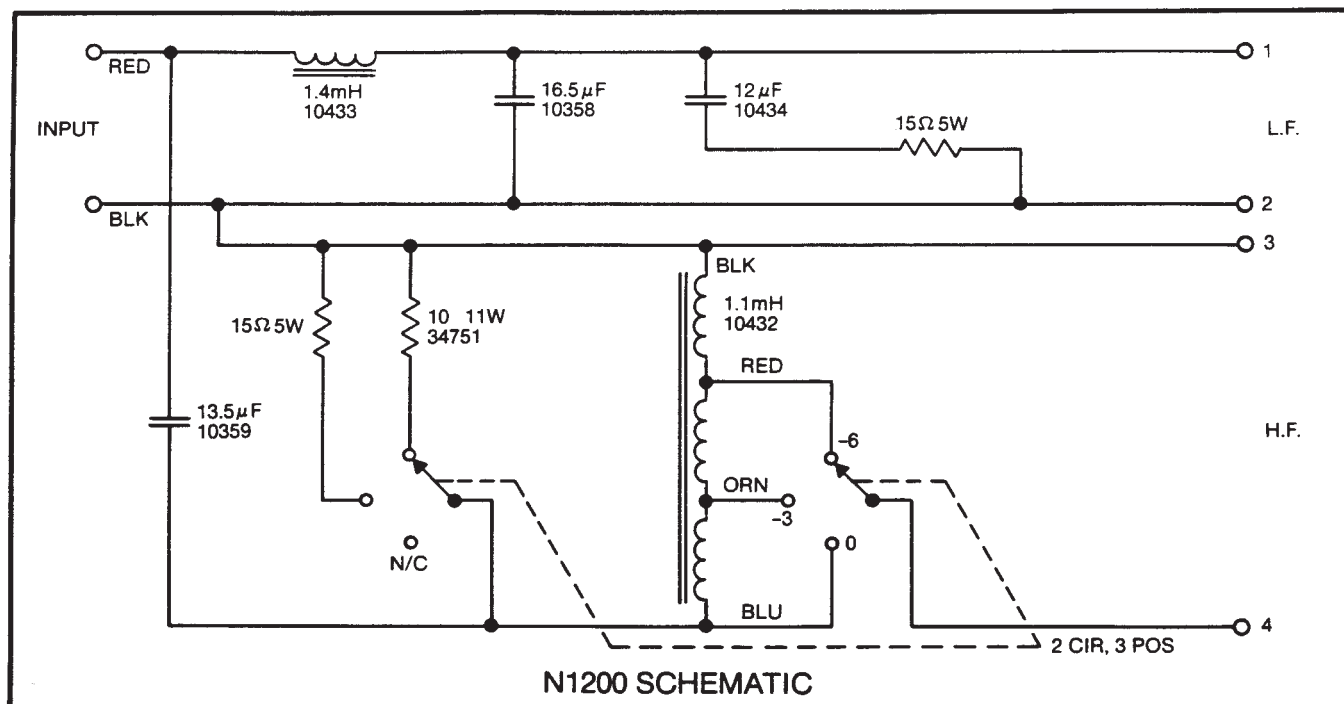

SYSTEM COMPONENTS:

LOW FREQUENCY DRIVER:

130A
Cone Kit:
C8R2220
Nom. Impedance:
8 Ohm
Dynamic Test Input V:
10
Sweep Frequency Hz:
20-1200
D.C. Resistance Ohms:
5.2 minimum
6.2 maximum

Gap Gauge: .057"

Notes:

If Not Serviceable,

Replace With: 2220H

Visual Change: Yes

Baffle Modification: No

Exact Acoustic Replacement: No.

Slightly different. Replace both units in a stereo pair.

Additional Parts Currently Available*:

Dome: 21042

Trim Gasket: 21058

HIGH FREQUENCY DRIVER:

LE175
Diaphragm Kit:
D16R2410
Nom. Impedance:
16 Ohm
Dynamic Test Input V:
3.5
Sweep Frequency Hz:
550-1200
D.C. Resistance Ohms:
5.9 minimum
7.0 maximum

HIGH FREQUENCY DRIVER (Cont'd)

Gap Gauge: .031"

Notes:

If Not Serviceable,

Replace With: 2425J

Visual Change: Yes

Baffle Modification: No

Exact Acoustic Replacement: No.

Slightly different. Replace both units in a stereo pair.

Additional Parts Currently Available*:

Horn: H91

(Lens L91 No

Longer Available)

SYSTEM SPECIFICATIONS:

Nominal Impedance:	8 Ohm
Power Capacity:	60 Watts
	Continuous Program
Crossover Frequency:	1200 Hz
Sensitivity:	88dB (1 Watt @ 15 Feet)
Enclosure Dim:	21-3/4" x 29-5/8" x 17-3/4" D
	(Without Base)
	55cm x 75cm x 45cm
Shipping Weight:	109 lbs. - 45 kg.
Additional Parts Currently Available*:	
Binding Posts: Red:	10243
Black:	10244

*Other parts may also be available. Check with JBL for details.