


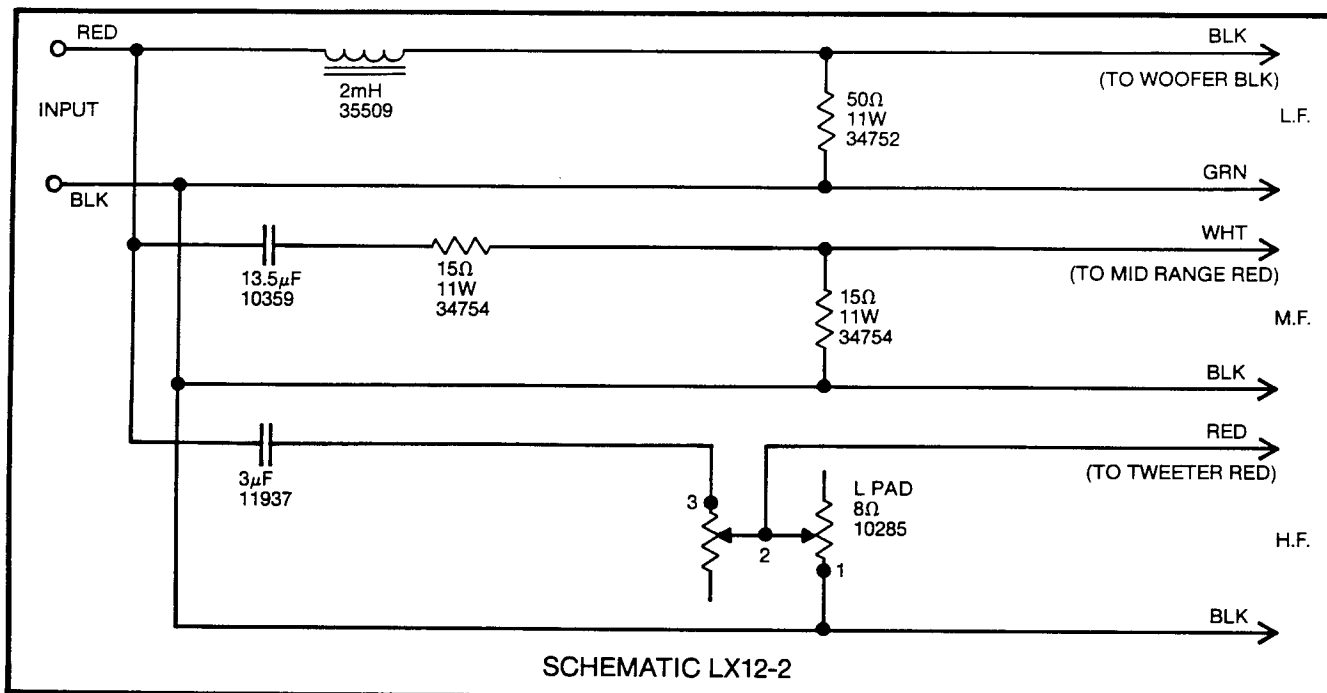

SYSTEM COMPONENTS:

LOW FREQUENCY DRIVER:

Cone Kit:	LE10A
Nom. Impedance:	C8RLE10A
Dynamic Test Input V:	8 Ohm
Sweep Frequency Hz:	6
D.C. Resistance Ohms:	20-1200
Gap Gauge:	4.4 min/5.0 max
Notes:	.048"
	Aquaplas On Cone.
	Dome Inverted.

If Not Serviceable, Replace With:	LE10H-1
Visual Change:	Yes
Baffle Modification:	No
Exact Acoustic Replacement:	No. Slightly different.
	Replace both units in a stereo pair.

Additional Parts Currently Available*:

Dome:	21514
Mounting Gasket:	21770
Trim Gasket:	21813

MID RANGE DRIVER:

Cone Kit:	LE5-3
Nom. Impedance:	C8RLE59
Dynamic Test Input V:	8 Ohm
Sweep Frequency Hz:	4
D.C. Resistance Ohms:	75-3000
Gap Gauge:	5.6 min/6.6 max
Notes:	.040"
	Dome Inverted
If Not Serviceable, Replace With:	LE5-10
Visual Change:	Yes

MID RANGE DRIVER (Cont'd)

Baffle Modification:	No
Exact Acoustic Replacement:	No. Slightly different.
	Replace both units in a stereo pair.

HIGH FREQUENCY DRIVER:

Diaphragm Kit:	LE20-1
Nom. Impedance:	D8RLE20
Dynamic Test Input V:	8 Ohm
Sweep Frequency Hz:	6
D.C. Resistance Ohms:	1000-6000
Gap Gauge:	3.7 min/4.2 max
Notes:	.029"
	Test With Network
If Not Serviceable, Replace With:	035TiA
Visual Change:	Yes
Baffle Modification:	No
Exact Acoustic Replacement:	No. Use as last resort.
	Replace both units in a stereo pair.

Additional Parts Currently Available*:

Trim Ring:	21600
------------	-------

SYSTEM SPECIFICATIONS:

Nom. Impedance:	8 ohm
Power Capacity:	50 Watts Continuous Program
Crossover Frequencies:	500 Hz, 4000 Hz
Sensitivity:	70dB (1 Watt @ 15 Feet)
Enclosure Dim:	20" x 20" x 13" D
	51cm x 51cm x 33cm
Shipping Weight:	55 lbs. - 25 kg.

*Other parts may also be available. Check with JBL for details.