


SPECIFICATIONS: NOTE ①

LOAD Z	LOW PASS	CROSS OVER	HIGH PASS	ATTENU- ATION	
8		400HZ			* $\pm 2dB$
		LF -4			
		MF -7*	MF -4*	MF VAR	
		1.3KHZ	3 KHZ		
		MF -6.5*			
		HF -6.5	HF +1	HF VAR	
		8.5KHZ			
		HF -8			
		UHF -8*	UHF -5	UHF VAR	

CIRCUIT:

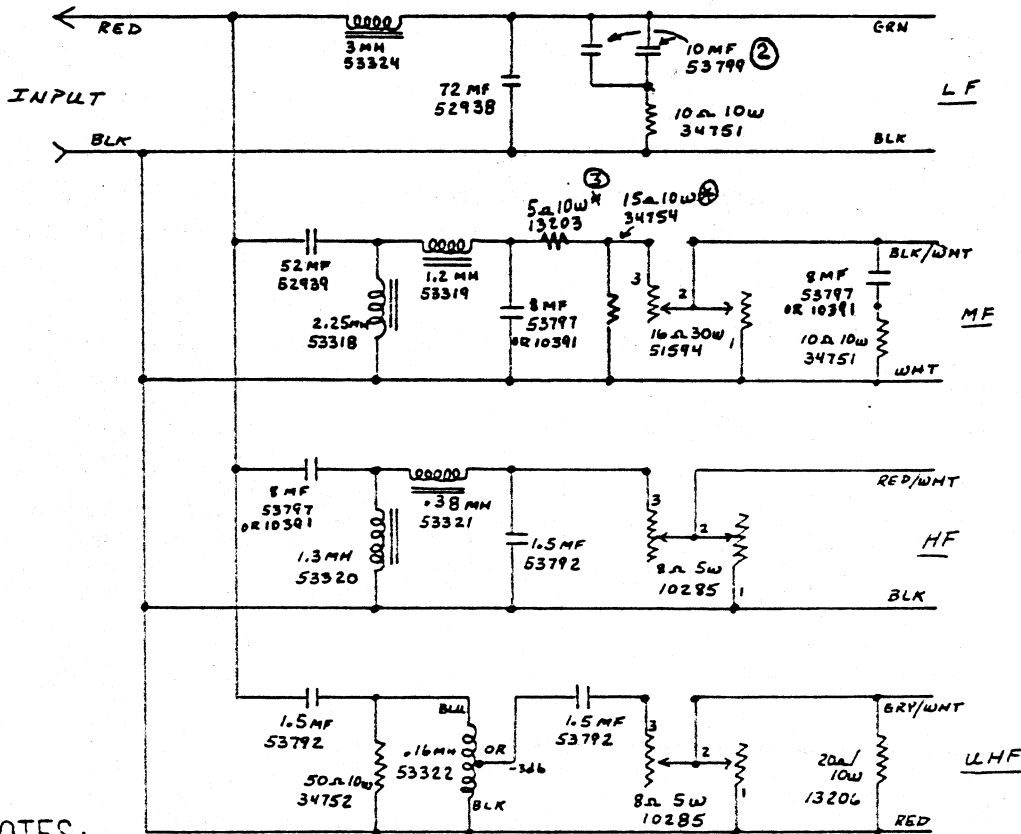

NOTES:

- ① USE STANDARD TEST FIXTURE
- ② LF SECTION - (2) 53799 10MF MAY BE (1) 53881 20MF
- ③ MF SECTION - RESISTORS MARKED (*) ADDED FOR MID-RANGE ATTENUATION