

Ti10K

SPECIFICATIONS



ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- * Nominal Impedance: 6 ohm
- * Recommended Amp Power: 50-400 W
- * Frequency Response: 40 Hz - 22 kHz (± 2 dB)
- * Sensitivity: 90 dB / 2.8V / 1 m
- * Crossover frequency: 200/1200/3.5 KHZ

SYSTEM COMPONENTS:

- * Cabinet: CTI-10K (Not for sale)
- * Grille: GTI-10K (2404300)
- * Woofer: 808J 330mm (2)
51mm voice coil
DC Resistance: 10,7 ohm
- * Midbass: 806G-1 180mm
51mm voice coil
DC Resistance: 3,5 ohm

SYSTEM COMPONENTS: (cont'd)

- * Midrange: 804TI 125mm
40mm voice coil
DC Resistance: 4,1 ohm
- * Tweeter: T125K
DC Resistance: 3,8 ohm
- * Crossover Network: NTI10K (2704300)


PHYSICAL SPECIFICATIONS:

- * Enclosure Dimensions (H.W.D): 50.4x17.7x22.8 In. D
(1280x450x580mm D)
- * Shipping Weight: 137 lbs. (62 kg.)

WARRANTY INFORMATION:


- * Refer to the Warranty Statement packed with each product

PACKAGE

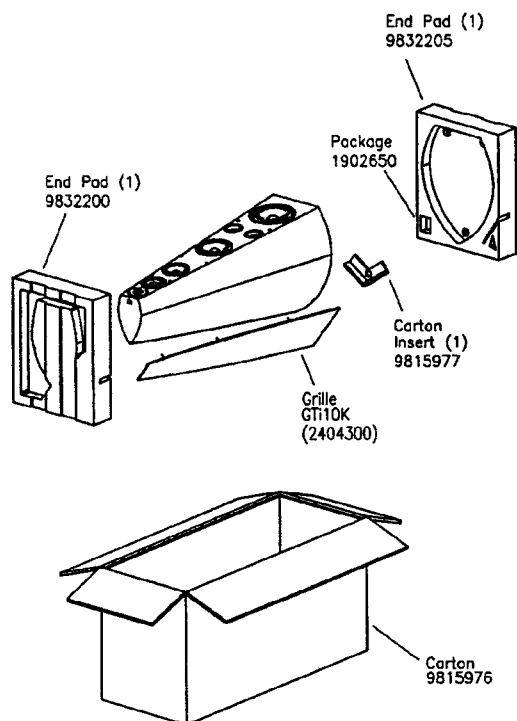

SCHEMATIC

SCHEMATIC TI-10K

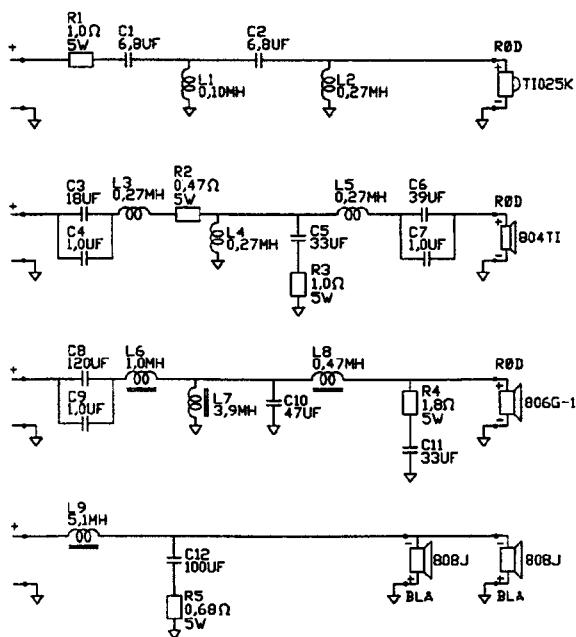

NOTE: CONE/DIAPHRAGM KIT NOT AVAILABLE.
DEFECTIVE DRIVER SHOULD BE REPLACED.

COMPONENT EXPLODED VIEW

