
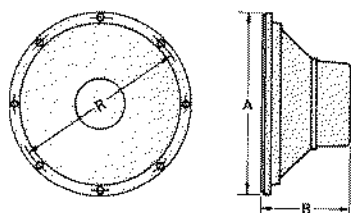



TECHNICAL DATA

CONE TRANSDUCERS


L362

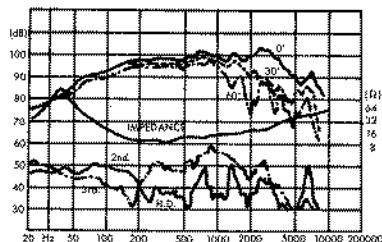

L470

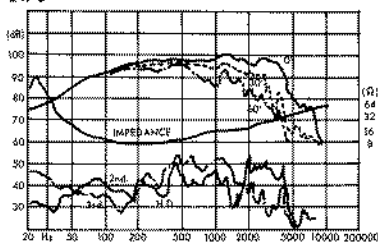


L569

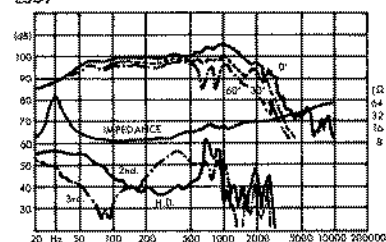


Model	Diameter (A) (mm)	Height (B) (mm)	Bolt Hole Diameter (mm)	Bolt Hole Qty-Dia. (mm)	Baffle Hole Diameter (mm) Front Mount	Baffle Hole Diameter (mm) Rear Mount
L345	312	127.5	294	4-7	280	278
L355	312	145.5	294	4-7	280	278
L362	314	138.5	294	4-7	280	278
L363	314	174.5	294	4-7	280	278
L467	395	143.5	375	8-7	356	356
L469	395	143.5	375	8-7	356	356
L470	395	157.4	375	8-7	356	356
L475	395	157.4	375	8-7	356	356
L477	395	157.4	375	8-7	356	356
L479	395	157.4	375	8-7	356	356
L569	464	198	441	8-7	427	422
L869	800	291	770	8-7	750	730

COMPRESSION DRIVERS



D252 + H320

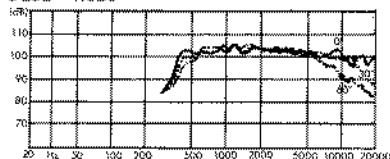

D276 + H351 + HA21

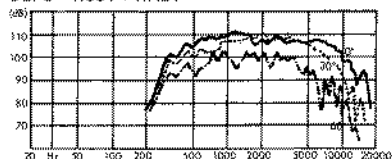


D506 + H251 + HA51

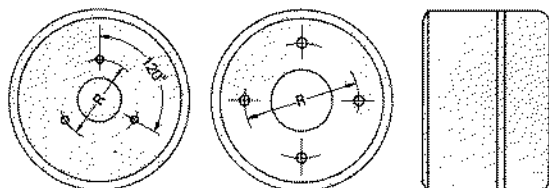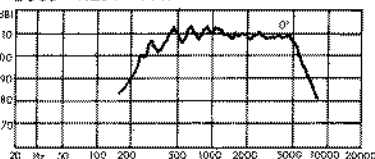


Throat Diameter	Bolt Hole Diameter (R)	Bolt Size	Models			
25.4mm	57.15	3-M6	D232	D252	D262	D266
			D272	D276		
50.4mm	101.6	4-M6	D502	D506	D582	D586

SUPER TWEETERS



T825

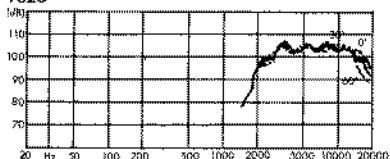

T845

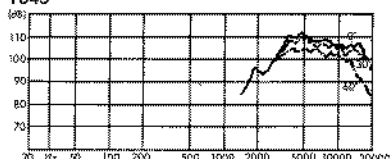


T925

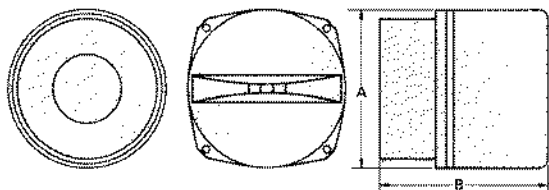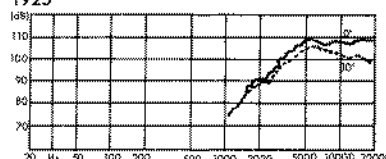


Model	Width (A)	Length (B)	Bolt Size	Mounting Hole Diameter (mm)
T825	90.2	107.5	4-M5	83
T845	92	102	4-M6	81
T925	82	108		USE P92
T945N	82	102		USE P94
P92	Mounting ring for T925		4-M5	78
P94	Mounting ring for T945N		4-M5	90

FULL-RANGE TRANSDUCERS



PS300

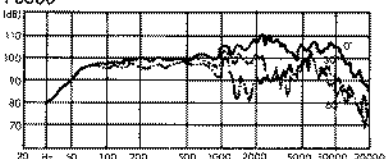

PS200

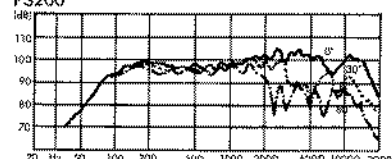

PS100

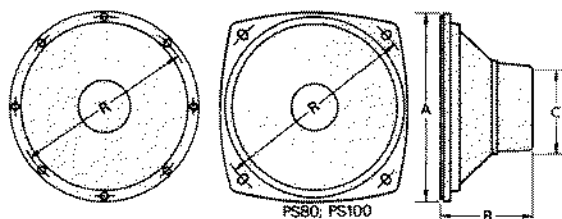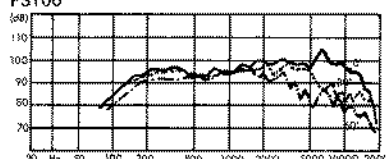

Model	Diameter (A)	Depth (B)	(C)	Bolt Hole Diameter (R) (mm)	Bolt Size	Mounting Hole Diameter (mm) Front Mount	Mounting Hole Diameter (mm) Rear Mount
PS80	83	44	60	86	4-4x6	72	70
PS100	105	47.1	80	115	4-5x7	93	147
PS160	165	77.5	100	155	4-5.2	146	147
PS200	209.6	94.5	120	193.8	4-5x8	182	181
PS300	312	135	156	292	8-6x8	278	278