


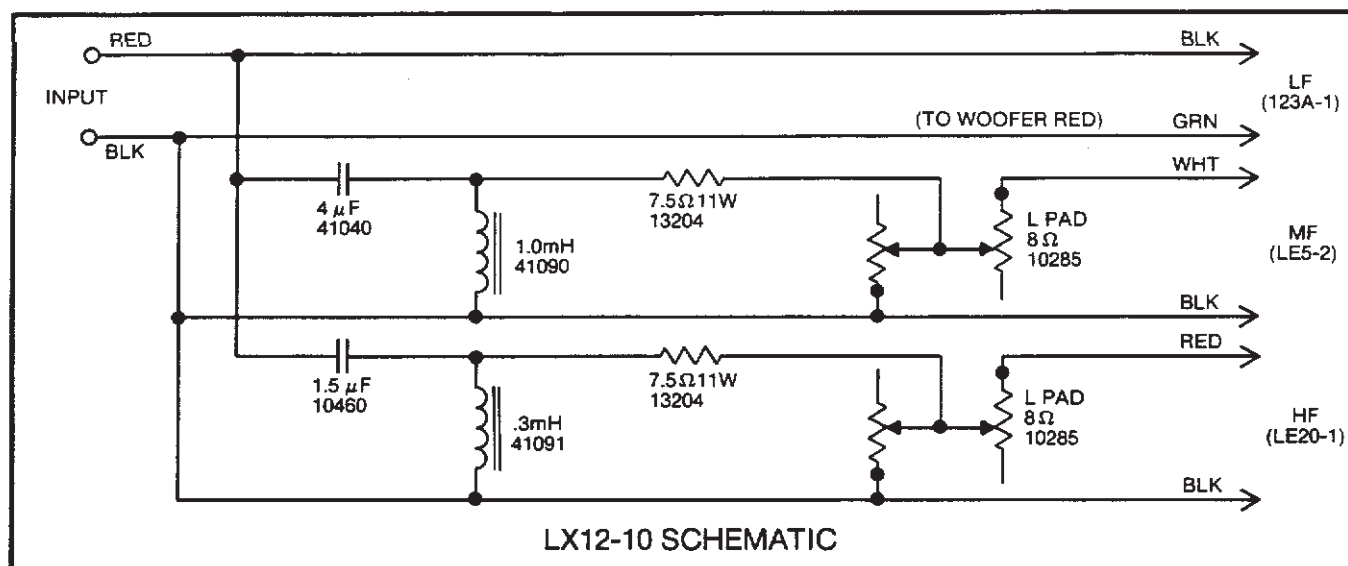

SYSTEM COMPONENTS:

LOW FREQUENCY DRIVER:

Cone Kit:	123A-1
Nom. Impedance:	C8R2212
Dynamic Test Input V:	8 Ohm
Sweep Frequency Hz:	6
D.C. Resistance Ohms:	20-1200
	4.5 minimum
	5.5 maximum
Gap Gauge:	.044"
Notes:	Aquaplas
If Not Serviceable,	2213H
Replace With:	(Reverse Polarity)
Visual Change:	Yes
Baffle Modification:	No
Exact Acoustic Replacement:	No.
	Slightly different. Replace both units
	in a stereo pair.

Additional Parts Currently Available*:

Dome:	31385
Trim Gasket:	32756

MID RANGE DRIVER:

Cone Kit:	LE5-2
Nom. Impedance:	C8RLE52
Dynamic Test Input V:	8 Ohm
Sweep Frequency Hz:	4
D.C. Resistance Ohms:	75-3000
	5.5 minimum
	6.5 maximum

Gap Gauge:	.040"
Notes:	Dome Inverted

If Not Serviceable,

Replace With: LE5-10

Visual Change: Yes

Baffle Modification: No

Exact Acoustic Replacement: No.

Slightly different. Replace both units
in a stereo pair.

MID RANGE DRIVER (Cont'd)

Additional Parts Currently Available*:

Dome:	54721
Trim Gasket:	29931

HIGH FREQUENCY DRIVER:

Diaphragm Kit:	LE20-1
Nom. Impedance:	D8RLE20
Dynamic Test Input V:	8 Ohm
Sweep Frequency Hz:	6
D.C. Resistance Ohms:	1000-6000
	3.7 minimum
	4.2 maximum

Gap Gauge:

Notes:

If Not Serviceable,

Replace With:

Visual Change: 035TiA

Baffle Modification: Yes

Exact Acoustic Replacement: No. Use as a last
resort. Replace both units in a stereo pair.


Additional Parts Currently Available*:

Trim Ring:	21600
------------	-------

SYSTEM SPECIFICATIONS:

Nominal Impedance:	8 Ohm
Power Capacity:	50 Watts
	Continuous Program
Crossover Frequencies:	2500 Hz, 7500 Hz
Sensitivity:	78dB (1 Watt @ 15 Feet)
Enclosure Dim:	14-1/2" x 23-1/2" x 13-3/4" D
	37cm x 60cm x 35cm
Shipping Weight:	54 lbs. - 24 kg.
Additional Parts Currently Available*:	
Grill:	G100-Cloth
Binding Posts: Red:	10243
Black:	10244

*Other parts may also be available. Check with JBL for details.

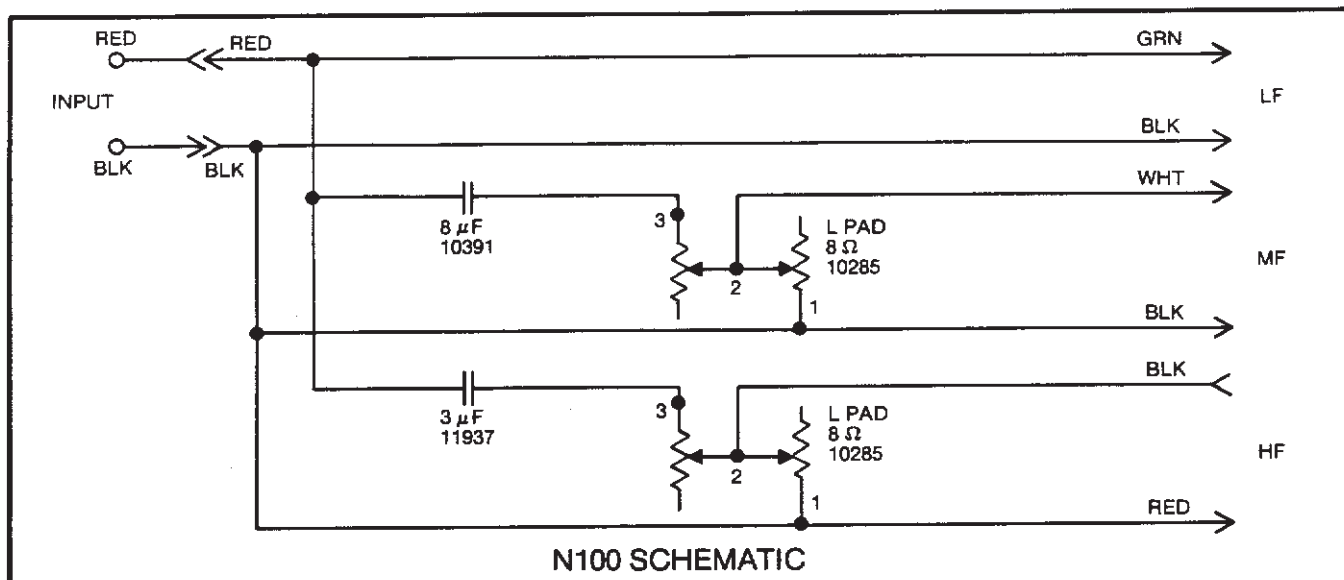

SYSTEM COMPONENTS:

LOW FREQUENCY DRIVER:

Cone Kit:	123A-1
Nom. Impedance:	C8R2212
Dynamic Test Input V:	8 Ohm
Sweep Frequency Hz:	6
D.C. Resistance Ohms:	20-1200
	4.5 minimum
	5.5 maximum
Gap Gauge:	.044"
Notes:	Aquaplas
If Not Serviceable,	2213H
Replace With:	(Reverse Polarity)
Visual Change:	Yes
Baffle Modification:	No
Exact Acoustic Replacement:	No.
	Slightly different. Replace both units
	in a stereo pair.
Additional Parts Currently Available*:	
Dome:	31385
Trim Gasket:	32756

MID RANGE DRIVER:

Cone Kit:	LE5-2
Nom. Impedance:	C8RLE52
Dynamic Test Input V:	8 Ohm
Sweep Frequency Hz:	4
D.C. Resistance Ohms:	75-3000
	5.5 minimum
	6.5 maximum
Gap Gauge:	.040"
Notes:	Dome Inverted
If Not Serviceable,	
Replace With:	LE5-10
Visual Change:	Yes
Baffle Modification:	No
Exact Acoustic Replacement:	No.
	Slightly different. Replace both units
	in a stereo pair.

MID RANGE DRIVER (Cont'd)

Additional Parts Currently Available*:

Dome:	54721
Trim Gasket:	29931

HIGH FREQUENCY DRIVER:

Diaphragm Kit:	LE25
Nom. Impedance:	D8RLE25
Dynamic Test Input V:	8 Ohm
Sweep Frequency Hz:	3
D.C. Resistance Ohms:	500-1200
	3.7 minimum
	4.2 maximum
Gap Gauge:	.029"
Notes:	
If Not Serviceable,	
Replace With:	035TiA
Visual Change:	Yes
Baffle Modification:	Yes
Exact Acoustic Replacement:	No.
	Slightly different. Replace both units
	in a stereo pair.

Additional Parts Currently Available*:

Trim Ring:	50402
Mounting Gasket:	50949-01
Dome:	21606


SYSTEM SPECIFICATIONS:

Nominal Impedance:	8 Ohm
Power Capacity:	50 Watts
	Continuous Program
Crossover Frequencies:	1500 Hz, 6000 Hz
Sensitivity:	78dB (1 Watt @ 15 Feet)
Enclosure Dim:	14-1/4" x 23-1/2" x 13-5/8" D
	36.2cm x 59.7cm x 34.6cm
Shipping Weight:	55 lbs. - 25 kg.
Additional Parts Currently Available*:	
Grill:	G100-Cloth
Binding Posts: Red:	56131
Black:	56130

*Other parts may also be available. Check with JBL for details.

L100A Century (Late Model)

JBL

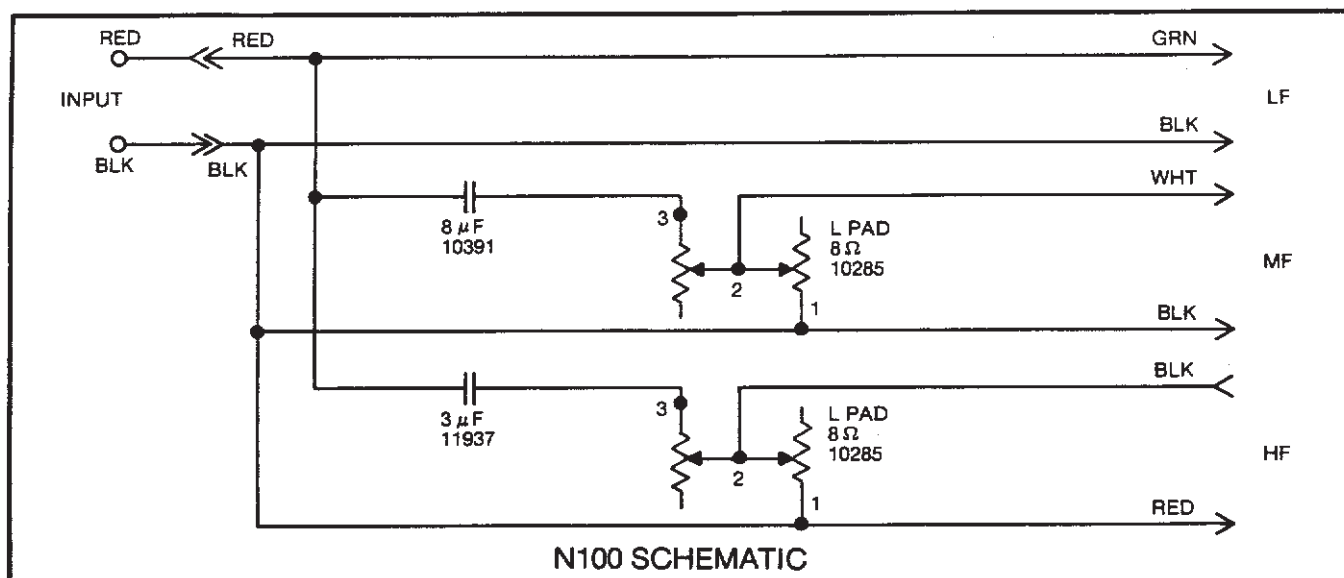

SYSTEM COMPONENTS:

LOW FREQUENCY DRIVER: 123A-3
 Cone Kit: C8R2213
 Nom. Impedance: 8 Ohm
 Dynamic Test Input V: 6
 Sweep Frequency Hz: 20-1200
 D.C. Resistance Ohms: 4.5 minimum
 5.5 maximum
 Gap Gauge: .048"
 Notes: Aquaplas
 If Not Serviceable,
 Replace With: 2213H
 Visual Change: Yes
 Baffle Modification: No
 Exact Acoustic Replacement: No.
 Slightly different. Replace both units
 in a stereo pair.
 Additional Parts Currently Available*:
 Dome: 31385
 Trim Gasket: 32756

MID RANGE DRIVER: LE5-2
 Cone Kit: C8RLE52
 Nom. Impedance: 8 Ohm
 Dynamic Test Input V: 4
 Sweep Frequency Hz: 75-3000
 D.C. Resistance Ohms: 5.5 minimum
 6.5 maximum
 Gap Gauge: .040"
 Notes: Dome Inverted
 If Not Serviceable,
 Replace With: LE5-10
 Visual Change: Yes
 Baffle Modification: No
 Exact Acoustic Replacement: No.
 Slightly different. Replace both units
 in a stereo pair.

MID RANGE DRIVER (Cont'd)

Additional Parts Currently Available*:
 Dome: 54721
 Trim Gasket: 29931

HIGH FREQUENCY DRIVER: LE25
 Diaphragm Kit: D8RLE25
 Nom. Impedance: 8 Ohm
 Dynamic Test Input V: 3
 Sweep Frequency Hz: 500-1200
 D.C. Resistance Ohms: 3.7 minimum
 4.2 maximum
 Gap Gauge: .029"
 Notes:
 If Not Serviceable,
 Replace With: 035TiA
 Visual Change: Yes
 Baffle Modification: Yes
 Exact Acoustic Replacement: No.
 Slightly different. Replace both units
 in a stereo pair.
 Additional Parts Currently Available*:
 Trim Ring: 50402
 Mounting Gasket: 50949-01
 Dome: 21606

SYSTEM SPECIFICATIONS:

Nominal Impedance: 8 Ohm
 Power Capacity: 50 Watts
 Continuous Program
 Crossover Frequencies: 1500 Hz, 6000 Hz
 Sensitivity: 78dB (1 Watt @ 15 Feet)
 Enclosure Dim: 14-1/4" x 23-1/2" x 13-5/8" D
 36.2cm x 59.7cm x 34.6cm
 Shipping Weight: 55 lbs. - 25 kg.
 Additional Parts Currently Available*:
 Grill: G100-Cloth
 Binding Posts: Red: 56131
 Black: 56130

*Other parts may also be available. Check with JBL for details.